Smartspeed-1 and **Smartspeed-2**






TOUCH SCREEN

The 250mm touch screen shows a live display of the gas filling process and IG pressure. The screen also allows access via a protected pin code entry to the menu screen where settings such as gas fill percentage, Data logging, overfill timer and calibration routine can be viewed and adjusted.

The Smartspeed range is available as either a single or twin line machine designed for high speed Argon gas filling.

The internal IG pressure sensor automatically regulates the variable filling speed between 70-85 litres a minute to ensure a pressure balanced and accurate gas fill. Features from the Smartfill range such as the Smartstart Remote, Data logging and Print Feature are included as standard.

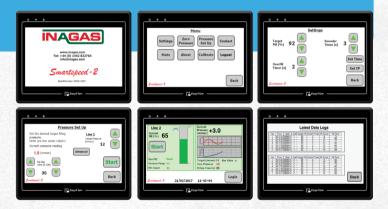

SPECIFICATIONS

H 1516mm x W 735mm x D 701mm 250mm, Touch Screen controls, Visual & audible signals on completion of fill Automatic IG pressure control, Auto and manual calibration of sensor, Ability to change gas fill percentages Variable overfill, Data logging and print feature as standard

Flow Rate: Up to 85 litres per minute. Smartspeed-1 can be upgraded to Smartspeed-2, Menu Pin code lock Alert when gas bottle empty, Language settings, Smartstart remote

FILL TIMES

1000mm x 1000mm x 12mm 32 seconds | 1000mm x 1000mm x 16mm 40 seconds

CONTACT

SALES

- O1455 251151
- sales@atlantic-machinery.co.uk

STUART HEADINGTON

- 07803 758291
- s.headington@atlantic-machinery.co.uk

